

- 316L# SS Housing
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65**    **COLOR**  
UDSSSM08102    MIRRORED  
UDSSB08102    BRUSHED
- POWER: 2x5/8W**




- **CODE - IP65**    **COLOR**  
UDSSSM08152    MIRRORED  
UDSSB08152    BRUSHED
- POWER: 2x5/8W**

- **CODE - IP65**    **COLOR**  
UDSSSM08202    MIRRORED  
UDSSB08202    BRUSHED
- POWER: 2x5/8W**



- **CODE - IP65**    **COLOR**  
UDSSSM08101    MIRRORED  
UDSSB08101    BRUSHED
- POWER: 1x5/10W**

- **CODE - IP65**    **COLOR**  
UDSSSM08151    MIRRORED  
UDSSB08151    BRUSHED
- POWER: 1x5/10W**

- **CODE - IP65**    **COLOR**  
UDSSSM08201    MIRRORED  
UDSSB08201    BRUSHED
- POWER: 1x5/10W**



• **PHOTOMETRIC [Unit: cd]**

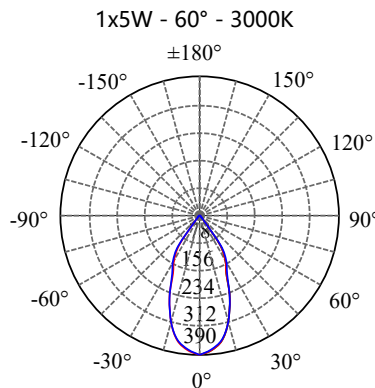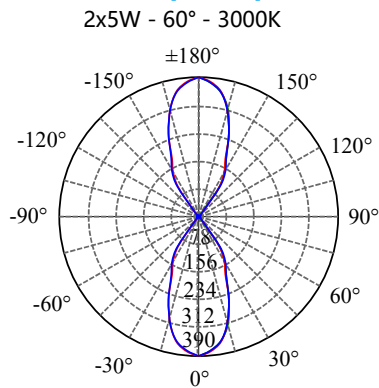

• **PERFORMANCE**

- 2x5W - 36V - 250mA - 886lm
- 2x8W - 36V - 350mA - 1367lm
- 1x5W - 36V - 150mA - 425lm
- 1x10W - 36V - 250mA - 882lm