

- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI ≥ 80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
UDRBB20302 BLACK
UDRBW20302 WHITE

POWER: 2x20/30/40/60W

- **CODE - IP20** **COLOR**
UDRBB20402 BLACK
UDRBW20402 WHITE



POWER: 2x20/30/40/60W

- **CODE - IP20** **COLOR**
UDRBB20301 BLACK
UDRBW20301 WHITE




POWER: 1x20/30/40/60W

- **CODE - IP20** **COLOR**
UDRBB20401 BLACK
UDRBW20401 WHITE

POWER: 1x20/30/40/60W

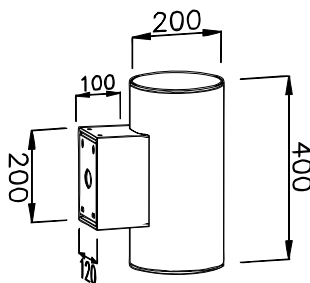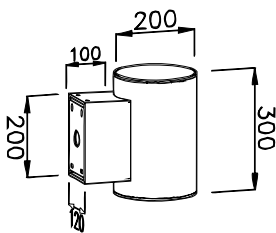

• **PHOTOMETRIC [Unit:: cd]**

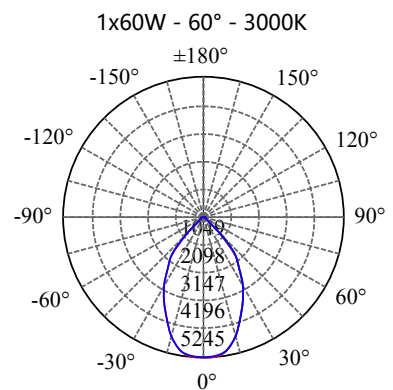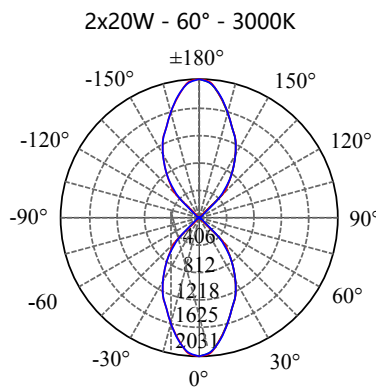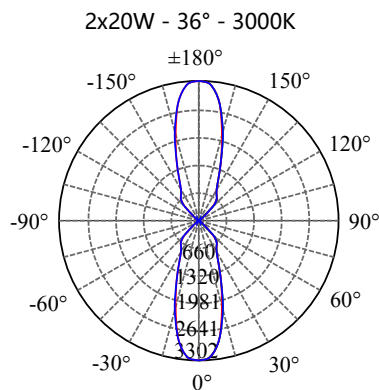

• **PERFORMANCE**

- 2x20W - 36V - 1050mA - 4247lm
- 2x30W - 36V - 1500mA - 6260lm
- 2x40W - 36V - 2100mA - 8385lm
- 2x60W - 36V - 3300mA - 12326lm

- 1x20W - 36V - 500mA - 2127lm
- 1x30W - 36V - 750mA - 3185lm
- 1x40W - 36V - 1050mA - 4270lm
- 1x60W - 36V - 1650mA - 6263lm