
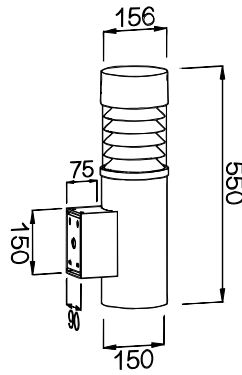



- Aluminium housing with corrosion resistant powdercoat
- 4mm thick PMMA diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65** **COLOR**
- WLRFLB1545 BLACK
- WLRFLG1545 GREY
- WLRFLW1545 WHITE
- POWER:** 1x15/20/30W

- **CODE - IP65** **COLOR**
- WLRFLB1555 BLACK
- WLRFLG1555 GREY
- WLRFLW1555 WHITE
- POWER:** 1x15/20/30W

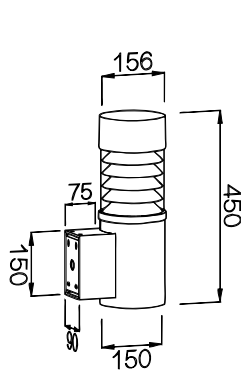

• **PHOTOMETRIC [Unit: cd]**

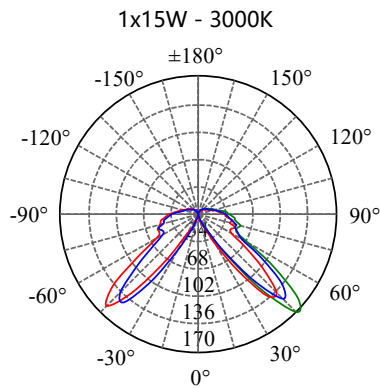

• **PERFORMANCE**

- 1x15W - 36V - 350mA - 872lm
- 1x20W - 36V - 500mA - 1165lm
- 1x30W - 36V - 750mA - 1747lm