




- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000/6000K/CRI ≥ 80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years


- **CODE-IP65 COLOR**  
SDRB2020 BLACK  
SDRG2020 GREY  
SDRW2020 WHITE

POWER: 1x20/30/40/60W




- **CODE-IP65 COLOR**  
SDRB2030 BLACK  
SDRG2030 GREY  
SDRW2030 WHITE

POWER: 1x20/30/40/60W



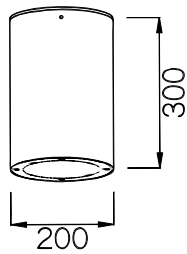


- **CODE-IP65 COLOR**  
SDRB2040 BLACK  
SDRG2040 GREY  
SDRW2040 WHITE

POWER: 1x20/30/40/60W

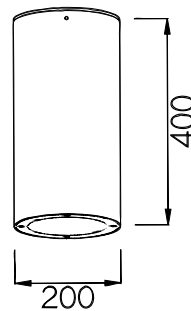

• **PHOTOMETRIC [Unit: cd]**

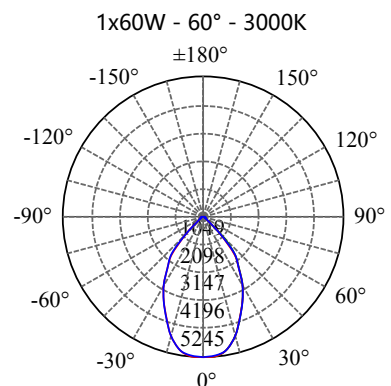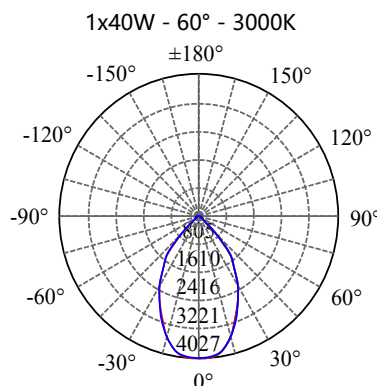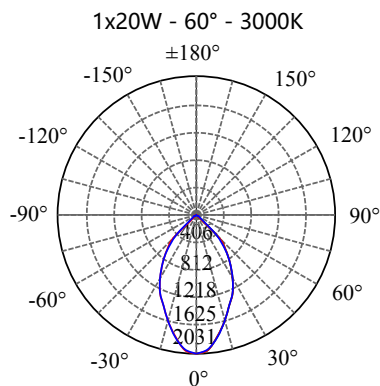

• **PERFORMANCE**

- 1x20W - 36V - 500mA - 2127lm
- 1x30W - 36V - 700mA - 3185lm
- 1x40W - 36V - 1050mA - 4270lm
- 1x60W - 36V - 1500mA - 6263lm