


- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years


- **CODE-IP65** **COLOR**
 SDRB1010 BLACK
 SDRG1010 GREY
 SDRW1010 WHITE

POWER: 1x5/10/15W




- **CODE-IP65** **COLOR**
 SDRB1015 BLACK
 SDRG1015 GREY
 SDRW1015 WHITE

POWER: 1x5/10/15W





- **CODE-IP65** **COLOR**
 SDRB1020 BLACK
 SDRG1020 GREY
 SDRW1020 WHITE

POWER: 1x5/10/15W

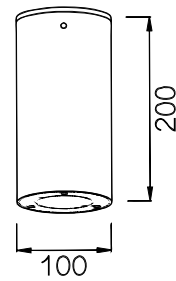

• **PHOTOMETRIC [Unit: cd]**

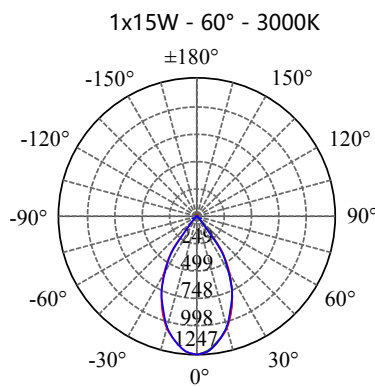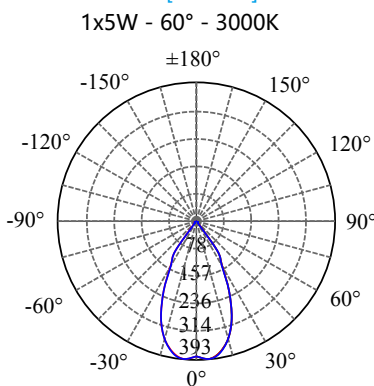

• **PERFORMANCE**

- 1x5W - 36V - 150mA - 448lm
- 1x10W - 36V - 250mA - 895lm
- 1x15W - 36V - 350mA - 1232lm