



• **PHOTOMETRIC [Unit::cd]**

2x30W - 36° - 3000K

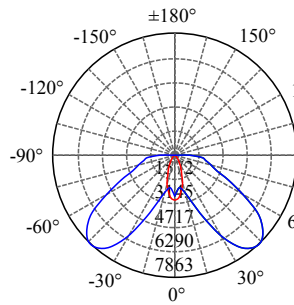

2x60W - 60° - 3000K

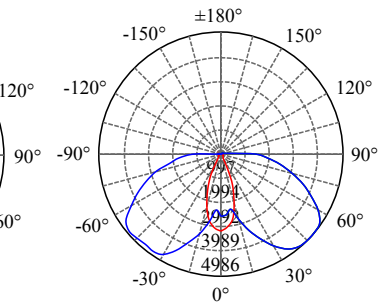


- Aluminium housing with corrosion resistant powdercoat
- 4mm thick PMMA diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3 years

- **Height** 2500mm
- **CODE - IP65** **COLOR**
- GLRADJB202502 BLACK
- GLRADJG202502 GREY
- **POWER:**1x20/30/40/60W

- **Height** 3500mm
- **CODE - IP65** **COLOR**
- GLRADJB203502 BLACK
- GLRADJG203502 GREY
- **POWER:**1x20/30/40/60W

- **PERFORMANCE**
- 2x20W - 36V - 1050mA - 3980lm
- 2x30W - 36V - 1650mA - 5972lm
- 2x40W - 36V - 2100mA - 7965lm
- 2x60W - 36V - 3300mA - 11991lm

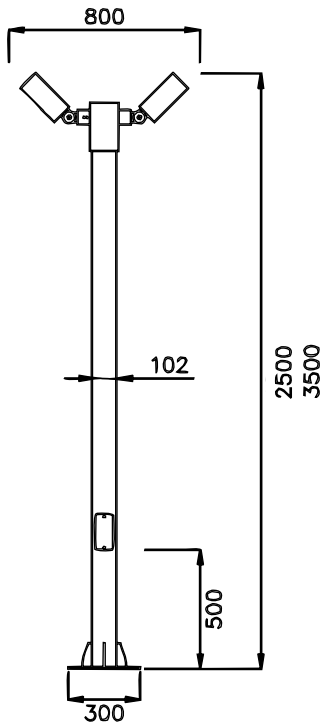

- **Mounting Accessroy**
- 4 x Φ20 Mounted Holes
- 4 x M16 - H400 Bolts

