

- 316L# SS Housing
- 8mm thick toughened FLUSH glass diffuser
- CE / SAA / IP65 / IK08 / Class 1
- CREE / Bridgelux COB: 3000K / 4000 / 6000K / CRI ≥ 80/90
- Beam Angle: 12° / 24° / 36° / 60°
- Input: 220-240Vac / WT:-20~+50° C
- Warranty: 3 / 5 years

- **CODE - IP65** **COLOR**
 UDRSSM10102 MIRRORED
 UDRSSB10102 BRUSHED
POWER: 2x5/8W




- **CODE - IP65** **COLOR**
 UDRSSM10152 MIRRORED
 UDRSSB10152 BRUSHED
POWER: 2x5/8W

- **CODE - IP65** **COLOR**
 UDRSSM10202 MIRRORED
 UDRSSB10202 BRUSHED
POWER: 2x5/8W



- **CODE - IP65** **COLOR**
 UDRSSM10101 MIRRORED
 UDRSSB10101 BRUSHED
POWER: 1x5/10/15W

- **CODE - IP65** **COLOR**
 UDRSSM10151 MIRRORED
 UDRSSB10151 BRUSHED
POWER: 1x5/10/15W

- **CODE - IP65** **COLOR**
 UDRSSM10201 MIRRORED
 UDRSSB10201 BRUSHED
POWER: 1x5/10/15W

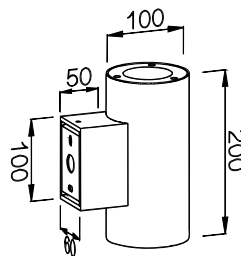

• **PHOTOMETRIC [Unit: cd]**

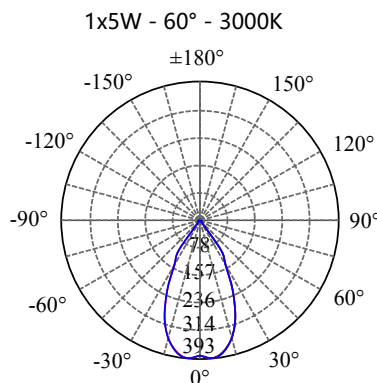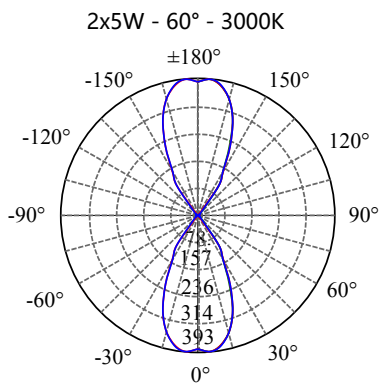

• **PERFORMANCE**

- 1x5W - 36V - 150mA - 488lm
- 1x10W - 36V - 250mA - 909lm
- 1x15W - 36V - 350mA - 1432lm

- 2x5W - 36V - 250mA - 917lm
- 2x8W - 36V - 350mA - 1484lm