

- 316L# SS Housing
- 8mm thick toughened FLUSH glass diffuser
- CE / SAA / IP65 / IK08 / Class 1
- CREE / Bridgelux COB: 3000K / 4000 / 6000K / CRI ≥ 80/90
- Beam Angle: 12° / 24° / 36° / 60°
- Input: 220-240Vac / WT:-20~+50° C
- Warranty: 3 / 5 years

- **CODE - IP65**    **COLOR**  
 UDRSSM08102    MIRRORRED  
 UDRSSB08102    BRUSHED  
 POWER: 2x5/8W




- **CODE - IP65**    **COLOR**  
 UDRSSM08152    MIRRORRED  
 UDRSSB08152    BRUSHED  
 POWER: 2x5/8W

- **CODE - IP65**    **COLOR**  
 UDRSSM08202    MIRRORRED  
 UDRSSB08202    BRUSHED  
 POWER: 2x5/8W



- **CODE - IP65**    **COLOR**  
 UDRSSM08101    MIRRORRED  
 UDRSSB08101    BRUSHED  
 POWER: 1x5/10W

- **CODE - IP65**    **COLOR**  
 UDRSSM08151    MIRRORRED  
 UDRSSB08151    BRUSHED  
 POWER: 1x5/10W

- **CODE - IP65**    **COLOR**  
 UDRSSM08201    MIRRORRED  
 UDRSSB08201    BRUSHED  
 POWER: 1x5/10W

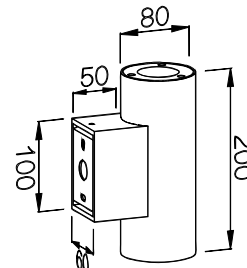

• **PHOTOMETRIC [Unit: cd]**

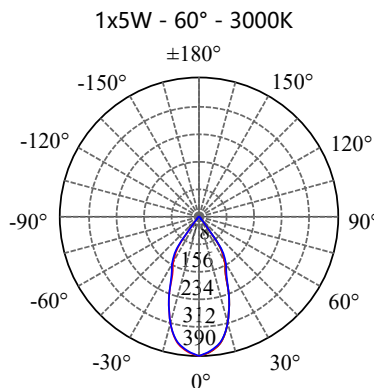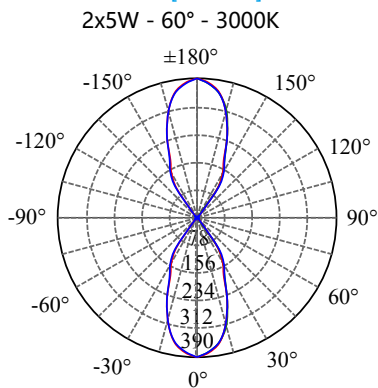

• **PERFORMANCE**

- 2x5W - 36V - 250mA - 906lm
- 2x8W - 36V - 350mA - 1467lm
- 1x5W - 36V - 150mA - 475lm
- 1x10W - 36V - 250mA - 902lm