

- 316L# SS Housing
- 8mm thick toughened FLUSH glass diffuser
- CE / SAA / IP65 / IK08 / Class 1
- CREE / Bridgelux COB: 3000K / 4000 / 6000K / CRI ≥ 80/90
- Beam Angle: 12° / 24° / 36° / 60°
- Input: 220-240Vac / WT:-20~+50° C
- Warranty: 3 / 5 years

- **CODE - IP65** **COLOR**
 UDRSSM15152 MIRRORED
 UDRSSB15152 BRUSHED
POWER: 2x15/20W




- **CODE - IP65** **COLOR**
 UDRSSM15202 MIRRORED
 UDRSSB15202 BRUSHED
POWER: 2x15/20/30W

- **CODE - IP65** **COLOR**
 UDRSSM15302 MIRRORED
 UDRSSB15302 BRUSHED
POWER: 2x15/20/30W


- **CODE - IP65** **COLOR**
 UDRSSM15151 MIRRORED
 UDRSSB15151 BRUSHED
POWER: 1x15/20/30W

- **CODE - IP65** **COLOR**
 UDRSSM15201 MIRRORED
 UDRSSB15201 BRUSHED
POWER: 1x15/20/30W


- **CODE - IP65** **COLOR**
 UDRSSM15301 MIRRORED
 UDRSSB15301 BRUSHED
POWER: 1x15/20/30W

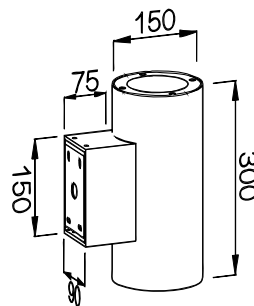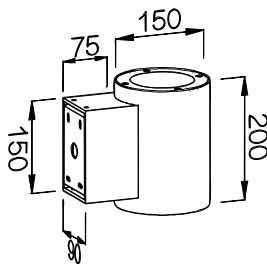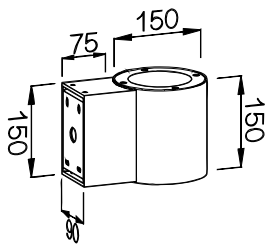


• **PHOTOMETRIC [Unit:: cd]**
 2x15W - 24° - 3000K

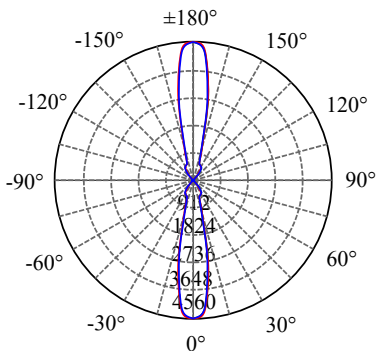

2x20W - 60° - 3000K

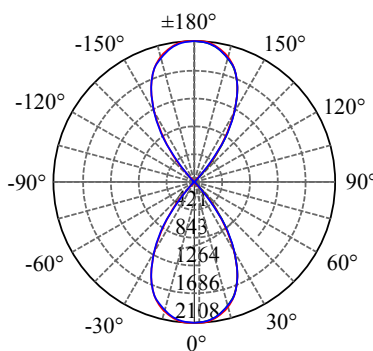

2x30W - 60° - 3000K

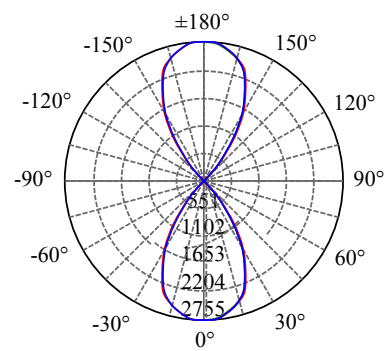

• **PERFORMANCE**

- 2x15W - 36V - 700mA - 2853lm
- 2x20W - 36V - 1000mA - 3875lm
- 2x30W - 36V - 1400mA - 5756lm

- 1x15W - 36V - 350mA - 1456lm
- 1x20W - 36V - 500mA - 1939lm
- 1x30W - 36V - 700mA - 2858lm